

Test Certificate

Exova Salford Coatings,
6 Coronet Way, Centenary Park, Salford M50 1RE
Tel 0161 787 3250 Fax 0161 787 3251

Kanat Boyacilik Ticaret AS
PO Box 1626
Ankara Asfalti 29. KM No.357,
Kemalpasa,
Izmir.
TURKEY

REF No N950967 :1
Ord No
Date Tested 22/05 -19/06/2009
Date Reported 22/06/2009

Item: 1 coated steel panels of size 300 x 65mm

**Testing carried out in accordance with ASTM G8 2003 (at ambient temperature) -
Cathodic Disbonding of Pipeline Coatings**



Sample # 588		16200 Kanepox Glassflake HB
Dry Film Thickness	Min	500 µm
	Max	602 µm
	Ave.	565 µm

Samples tested for a duration of 28 days at ambient temperature.

Artificial holidays created on panels = 6.5mm in diameter.



1001

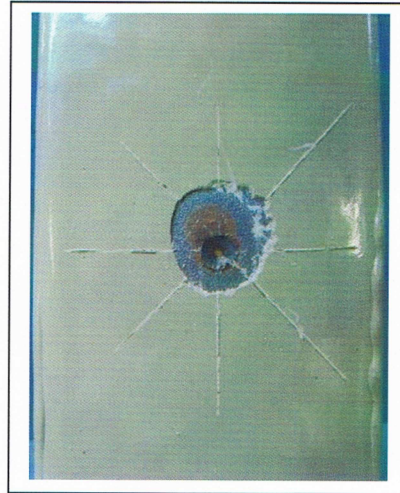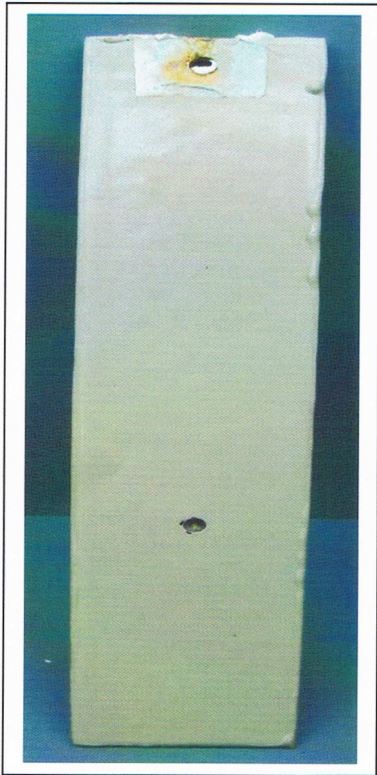

16200 Kanepox Glassflake HB
upon test completion

Sample	Mean Cathodic Disbondment Radius	Disbondment at Reference Holiday	Comments
16200 Kanepox Glassflake HB	5mm	None	-

L. M. BARRON

L.M. Barron
OPERATIONS MANAGER

Authored by: Mr D.P.Fielding

.....
For and on behalf of
Exova